

**LED STRIP LIGHT, Top LED type , MONO COLOR, Water Proof**

**TLS-SMD-10F-5050x-60**

**Features:**

- LED strip light, Mono color, Top LED type, Flexible, Water Proof
- Ultra brightness available
- PLCC6 top LED type
- 60pcs 5050 SMD LEDs per meter
- LED color: Red, Green, Blue, Yellow, white
- LED service life: 50,000-100,000hrs
- Continuous length flexible LED light strips
- Input: 12VDC
- Working Current: 3A for Single Color a reel
- Cut by every 3 LEDs
- Maintenance free, easy installation
- Application: commercial, residential and industrial environments;
- Can be used as backlighting in decoration and advertisement; can be used in illumination devices
- Standard Length: 5 Meters/Reel
- Printed Circuit Board thickness: 0.2-0.25mm



■ **Electrical-optical characteristics: (Ta=25 ) (Test Condition: IF=20mA)**

Part Number	Chip			Forward Voltage(VF) Unit:V		Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ1/2(deg)
	Emitted Color	Material	λ <sub>P</sub> (nm)					
				Typ	Max	Min.	Typ.	
TLS-SMD-10F-5050R-60	Ultra Orange	AlGaInP	630	11.5	12.5	500	700	100
TLS-SMD-10F-5050Y-60	Ultra Yellow	AlGaInP	590	11.5	12.5	400	600	
TLS-SMD-10F-5050G-60	Ultra Pure Green	InGaN	525	11.5	12.5	700	1000	
TLS-SMD-10F-5050B-60	Ultra Blue	InGaN	470	11.5	12.5	400	700	
TLS-SMD-10F-5050W-60	Ultra White	InGaN	/	11.5	12.5	600	1200	


■ **Full set of LED strip picture**



**LED STRIP LIGHT**, Top LED type , MONO COLOR, Water Proof

**TLS-SMD-10F-5050x-60**

**PCB OUTLINE AND DIMENSION**

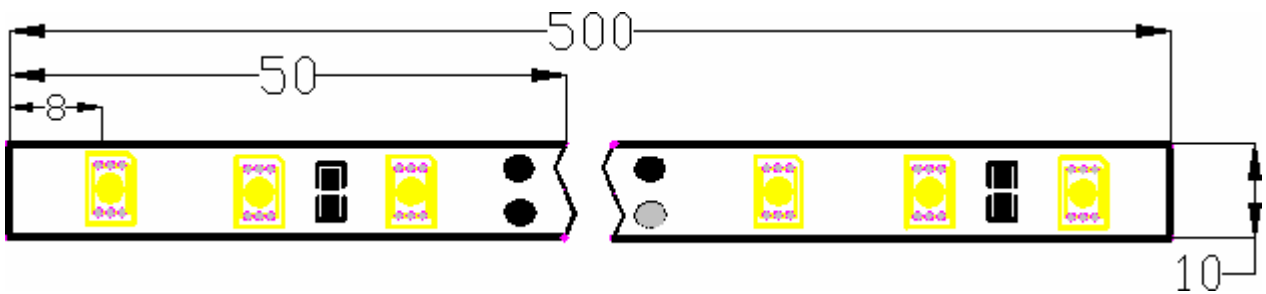

**Notes:**

- All dimensions are in millimeters (inches)
- Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
- Specifications are subject to change without notice.