

LED LAMP CLUSTER

BL-CR15AR3G4

Features:

- ∅ ·Shape: Round
- ∅ ·Diameter: 15mm
- ∅ ·High visibility
- ∅ ·Emitting Color: red, green
- ∅ ·No of Built-in 5mm LED Lamps :
- ∅ ·Ultra orange - 3pcs, ultra green – 4pcs
- ∅ ·Waterproof Package With Hood Suitable
- ∅ ·For Outdoor and Indoor Information Boards
- ∅ ·Rohs Compliance



Selection Guide

Part No.	Description
BL-CR15AR3G4	15mm Round Lamp cluster 3 red ,4 green, round packed

Description:

·Color Code & Chip characteristics: (Test Condition: IF=20mA)

Part No.	Built-in Lamp Package	Built-in Lamp Part No. BL-L	Chip		Lens Appearance	Electro-optical Data(At 20mA)			Viewing Angle 2:θ/2 (deg)
			Material/Emitted Color	Peak Wave Length λp (nm)		Vf (V)		Iv (mcd)	
						Typ	Max		
BL-CR15 AR3G4	4x5x7mm 1.0" Lead Oval	563UET	AlGaInP/ Ultra Orange	630	Water clear	2.10	2.50	800	X-X 45 Y-Y 25
		563UGT	AlGaInP/ Ultra Green	574	Water clear	2.20	2.50	700	

Notes:

1. θ/2 Is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Absolute Maximum Rating (Each Lamp, Ta=25°C Derate above 25°C)

Parameter	UE	UG	Unit
Forward Current I _F	30	30	mA
Power Dissipation P _d	78	78	mW
Reverse Voltage V _R	5	5	V
Peak Forward Current I _{PF} (Duty 1/10 @1KHZ)	100	100	mA
Operation Temperature T _{OPR}	-30 to +80		°C
Storage Temperature T _{STG}	-40 to +85		°C
Lead Soldering Temperature T _{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)		°C

LED LAMP CLUSTER

BL-CR15AR3G4

Package configuration & Internal circuit diagram:

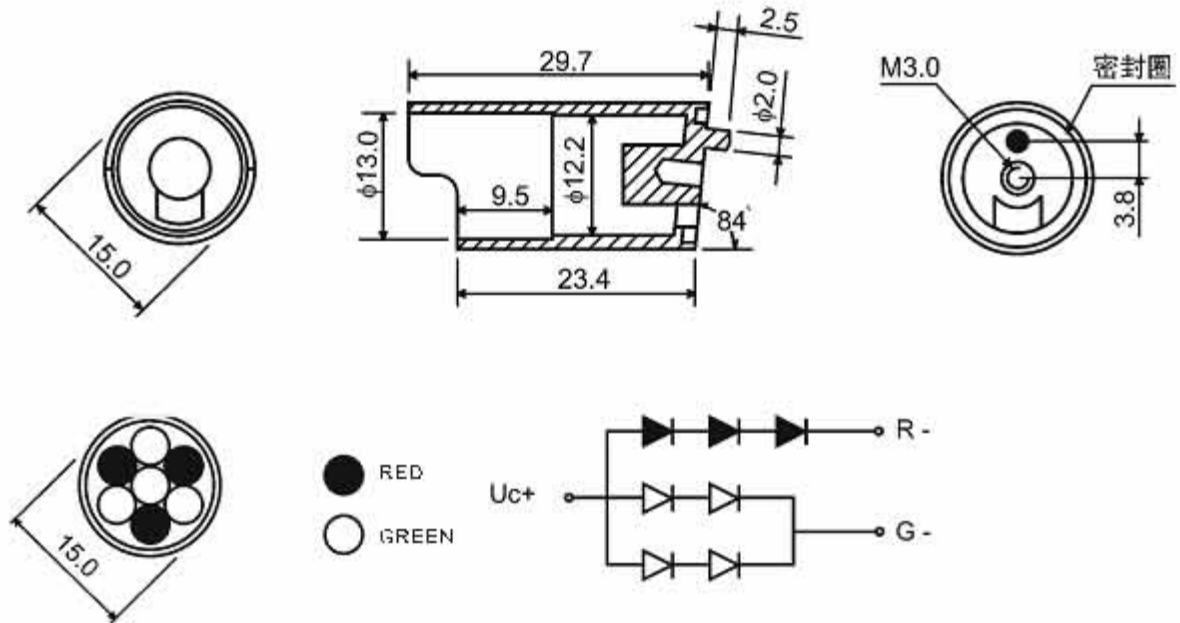


Notes:

- All dimensions are in millimeters (inches)
- Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
- Specifications are subject to change without notice.


LED LAMP CLUSTER

BL-CR15AR3G4


Typical electrical-optical characteristics curves:

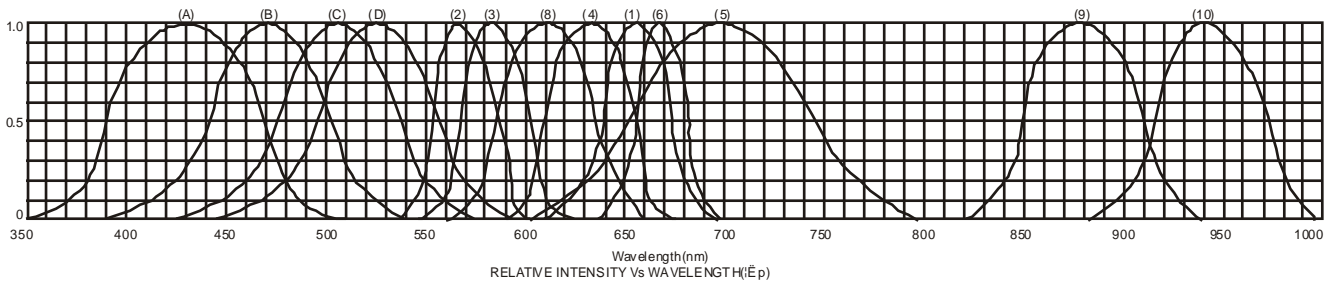


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaVSiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (V_f)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

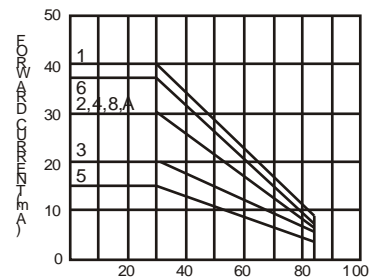

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

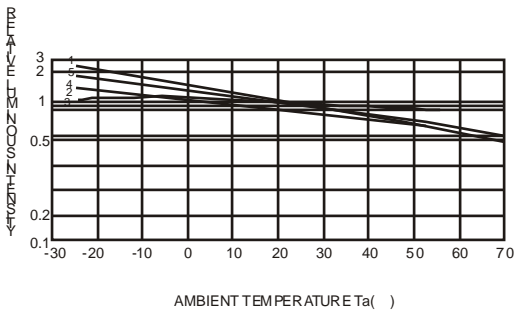

AMBIENT TEMPERATURE Ta(°C)

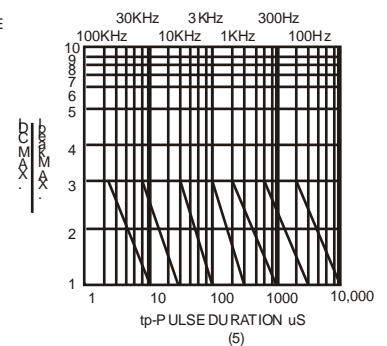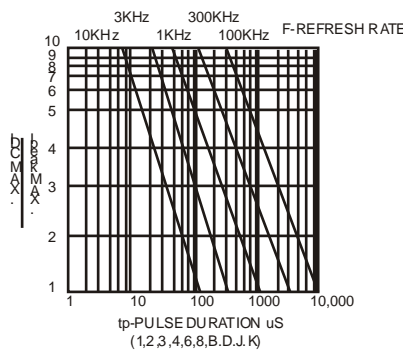

NOTE:25 free air temperature unless otherwise specified

LED LAMP CLUSTER

BL-CR15AR3G4

Packing and weighting

