

## LED DOT MATRIX

BL-M12X882

### Features:

- 32.00mm (1.2") Φ3.0 dot matrix LED display.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.



### Super Bright

Electrical-optical characteristics: (Ta=25° C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ <sub>P</sub> (nm)	Typ	Max	
BL-M12A882S-XX	BL-M12B882S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	200
BL-M12A882D-XX	BL-M12B882D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	320
BL-M12A882UR-XX	BL-M12B882UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	400
BL-M12A882E-XX	BL-M12B882E-XX	Red	GaAsP/GaP	635	2.10	2.50	190
BL-M12A882Y-XX	BL-M12B882Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	190
BL-M12A882G-XX	BL-M12B882G-XX	Green	GaP/GaP	570	2.20	2.50	195

### Ultra Bright

Electrical-optical characteristics: (Ta=25° C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ <sub>P</sub> (nm)	Typ	Max	
BL-M12A882UHR-XX	BL-M12B882UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	400
BL-M12A882UE-XX	BL-M12B882UE-XX	Ultra Red	AlGaInP	630	2.10	2.50	235
BL-M12A882YO-XX	BL-M12B882YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	235
BL-M12A882UY-XX	BL-M12B882UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	235
BL-M12A882UG-XX	BL-M12B882UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	250
BL-M12A882PG-XX	BL-M12B882PG-XX	Ultra Pure Green	InGaN	525	3.80	4.50	270
BL-M12A882B-XX	BL-M12B882B-XX	Ultra Blue	InGaN	470	2.70	4.20	180
BL-M12A882W-XX	BL-M12B882W-XX	Ultra White	InGaN	/	2.70	4.20	300

·-XX: Surface / Lens color:

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

**LED DOT MATRIX**
**BL-M12X882**
**Absolute maximum ratings (Ta=25°C)**

Parameter	S	D	UR	E	Y	G	Unit
Forward Current $I_F$	25	25	25	25	25	30	mA
Power Dissipation $P_d$	60	60	60	60	60	65	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	mA
Operation Temperature $T_{OPR}$	-40 to +80						°C
Storage Temperature $T_{STG}$	-40 to +85						°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)						°C

**■ Absolute maximum ratings (Ta=25°C)**


Parameter	UHR	UE	YO	UY	UG	PG	B	W	Unit
Forward Current $I_F$	30	30	30	30	30	30	30	30	mA
Power Dissipation $P_d$	75	65	65	65	75	110	120	120	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	mA
Operation Temperature $T_{OPR}$	-40 to +80								°C
Storage Temperature $T_{STG}$	-40 to +85								°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)								°C

# LED DOT MATRIX

BL-M12X882



## Package configuration & Internal circuit diagram

### BL-M12A882 Series

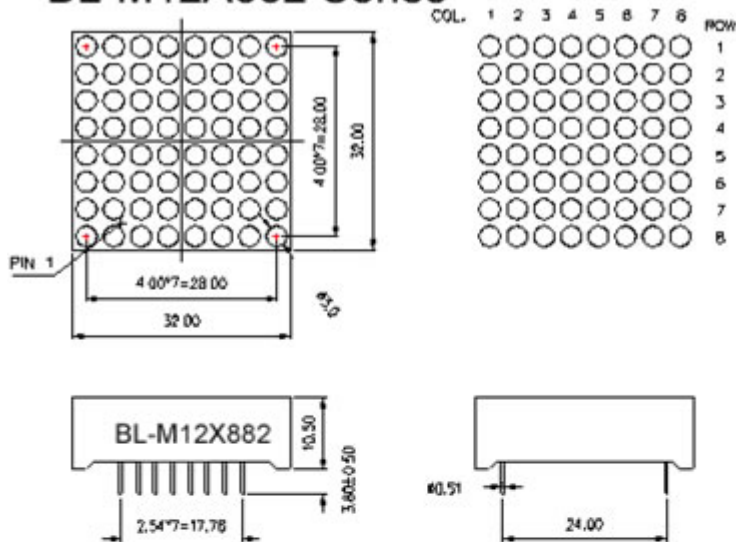

### BL-M12A882X

### BL-M12B882X

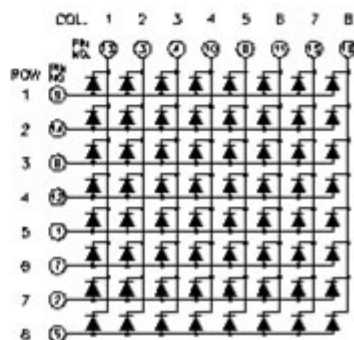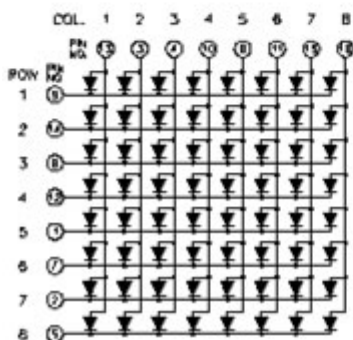


#### Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.


# LED DOT MATRIX

**BL-M12X882**

## Typical electrical-optical characteristics curves:

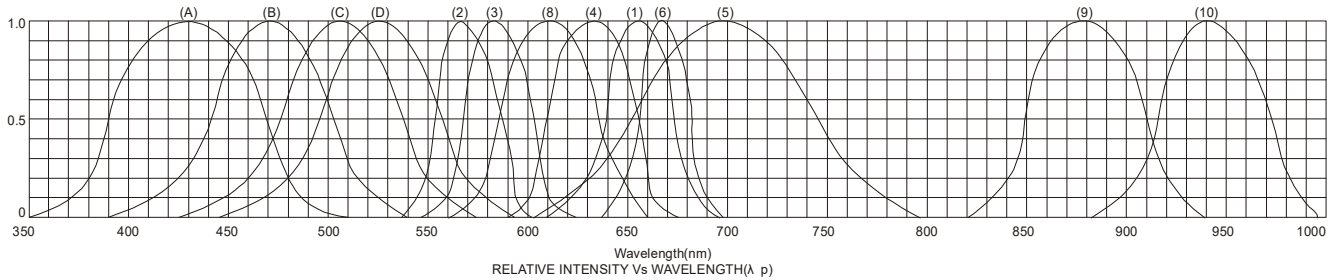

- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaN/SiC 525nm/Ultra Green



FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE



FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT



AMBIENT TEMPERATURE Ta(°C)  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE



AMBIENT TEMPERATURE Ta(°C)



NOTE:25°C free air temperature unless otherwise specified

**LED DOT MATRIX**

**BL-M12X882**

■ **Packing and weighting**

