

LED DOT MATRIX

BL-M15X884

Features:

- 38.00mm (1.5") Φ 3.7 dot matrix LED display.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.



Super Bright

Electrical-optical characteristics: (Ta=25 ° C) (Test Condition: IF=20mA)

Part No			Chip			VF Unit:V		Iv TYP.(mcd)
Row Column	Cathode Anode	Row Anode Column Cathode	Emitted Color	Material	λ_P (nm)	Typ	Max	
	BL-M15A884S-XX	BL-M15B884S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	250
	BL-M15A884D-XX	BL-M15B884D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	320
	BL-M15A884UR-XX	BL-M15B884UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	400
	BL-M15A884E-XX	BL-M15B884E-XX	Red	GaAsP/GaP	635	2.10	2.50	190
	BL-M15A884Y-XX	BL-M15B884Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	190
	BL-M15A884G-XX	BL-M15B884G-XX	Green	GaP/GaP	570	2.20	2.50	195

Ultra Bright

Electrical-optical characteristics: (Ta=25 ° C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ_P (nm)	Typ	Max	
BL-M15A884UHR-XX	BL-M15B884UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	400
BL-M15A884UE-XX	BL-M15B884UE-XX	Ultra Red	AlGaInP	630	2.10	2.50	235
BL-M15A884YO-XX	BL-M15B884YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	235
BL-M15A884UY-XX	BL-M15B884UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	235
BL-M15A884UG-XX	BL-M15B884UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	250
BL-M15A884PG-XX	BL-M15B884PG-XX	Ultra Pure Green	InGaIn	525	3.80	4.50	270
BL-M15A884B-XX	BL-M15B884B-XX	Ultra Blue	InGaIn	470	2.70	4.20	180
BL-M15A884UB-XX	BL-M15B884UB-XX	Ultra Blue	InGaIn	470	2.70	4.20	235
BL-M15A884W-XX	BL-M15B884W-XX	Ultra White	InGaIn	/	2.70	4.20	235
BL-M15A884UW-XX	BL-M15B884UW-XX	Ultra White	InGaIn	/	2.70	4.20	300

LED DOT MATRIX

BL-M15X884

--XX: Surface / Lens color:

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

Absolute maximum ratings (Ta=25°C)

Parameter		S	D	UR	E	Y	G	Unit
Forward Current I_F		25	25	25	25	25	30	mA
Power Dissipation P_d		60	60	60	60	60	65	mW
Reverse Voltage V_R		5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)		150	150	150	150	150	150	mA
Operation Temperature T_{OPR}	-40 to +80							°C
Storage Temperature T_{STG}	-40 to +85							°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)							°C

■ Absolute maximum ratings (Ta=25°C)


Parameter	UHR	UE	YO	UY	UG	PG	B	UB	W	UW	Unit
Forward Current I_F	30	30	30	30	30	30	30	30	30	30	mA
Power Dissipation P_d	75	65	65	65	75	110	120	120	120	120	mW
Reverse Voltage V_R	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	100	100	mA
Operation Temperature T_{OPR}	-40 to +80										°C
Storage Temperature T_{STG}	-40 to +85										°C
Lead Soldering Temperature T_{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)										°C

LED DOT MATRIX


BL-M15X884

■ Package configuration & Internal circuit diagram


BL-M15X884 Series

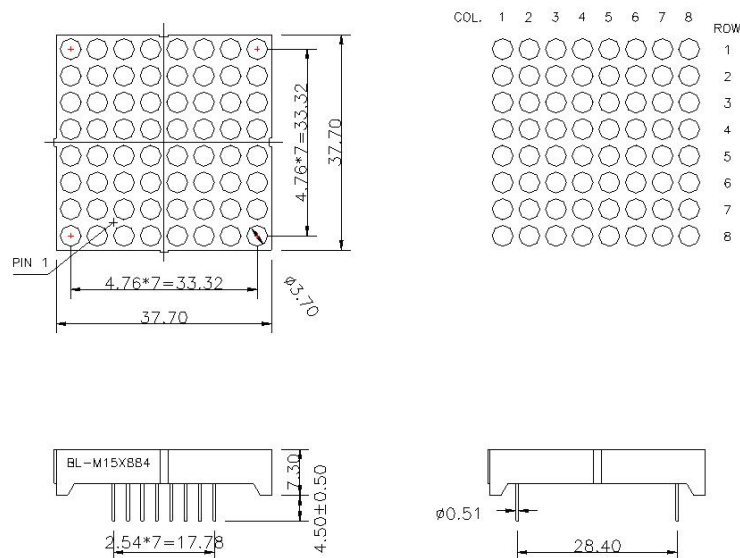

BL-M15A884

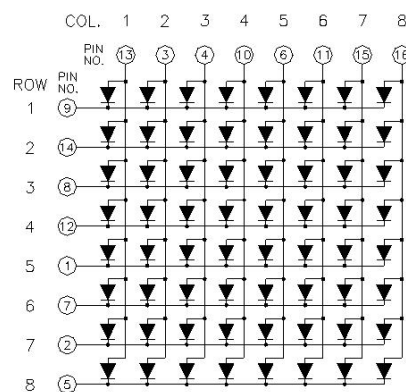

BL-M15B884

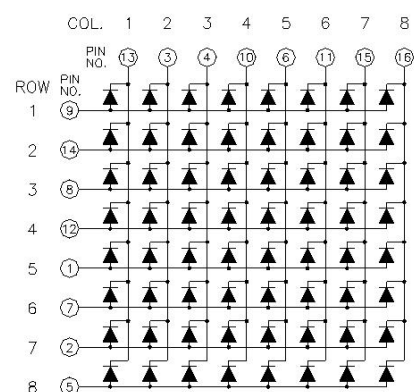


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


LED DOT MATRIX

BL-M15X884


■ Typical electrical-optical characteristics curves:

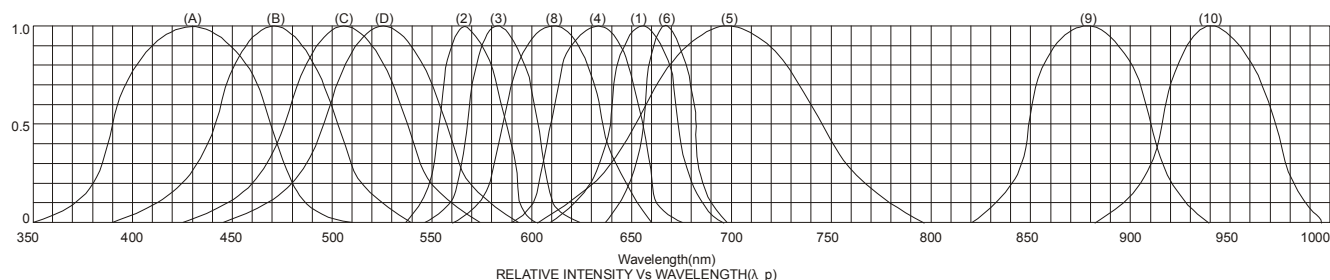


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

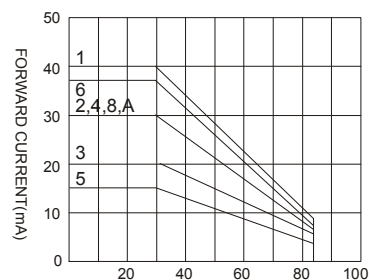

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

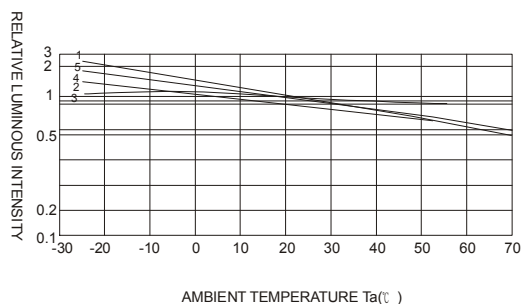

AMBIENT TEMPERATURE Ta(°C)

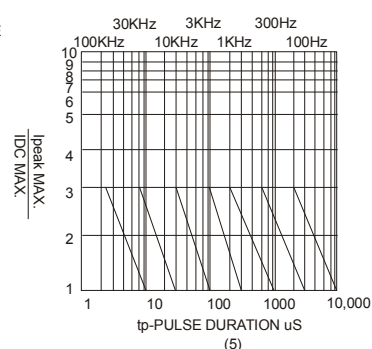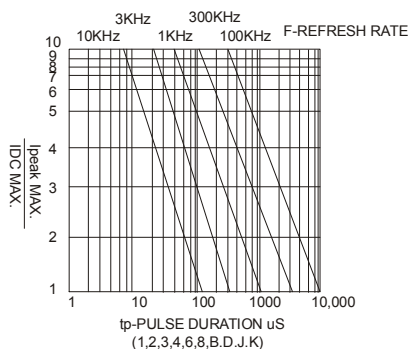

NOTE: 25°C free air temperature unless otherwise specified

LED DOT MATRIX

BL-M15X884

■ Packing and weighting

