

Round Type LED lamp, long lens head

BL-L314H16

Features:

- 3mm Round Type LED Lamps. 16mm long lens head
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens are available.
- IC compatible /Low current capability.
- RoHs Compliance



■ Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ1/2(deg)
	Emitted Color	Material	λP (nm)		Typ	Max	Min.	Typ.	
BL-L314H16HD	Red	GaP/GaP	700	Color Diffused	2.25	2.60	0.5	3	60
BL-L314H16ED	Red	GaAsP/GaP	635		2.10	2.50	2	20	
BL-L314H16SRC	Hi Red	AlGaAs,SH	660	Water Clear	1.85	2.20	50	220	30
BL-L314H16LRC	Super Red	AlGaAs,DH	660		1.85	2.20	200	500	
BL-L314H16URC	Ultra Red	AlGaAs,DDH	660		1.95	2.20	500	900	
BL-L314H16UEC	Ultra Red	AlGaInP	630		2.10	2.50	900	1800	
BL-L314H16UYC	Ultra Yellow	AlGaInP	590		2.10	2.50	900	2000	
BL-L314H16UGC	Ultra Green	AlGaInP	574		2.20	2.50	220	600	
BL-L314H16PGC	Ultra Pure Green	InGaN	525		3.80	4.50	1200	3000	
BL-L314H16BGC	Ultra Bluish Green	InGaN	505		3.80	4.50	900	2800	
BL-L314H16UBC	Ultra Blue	InGaN	470		2.70	4.20	500	1400	
BL-L314H16VC	UV	InGaN	405		3.80	4.50	100	150	
BL-L314H16UWC	Ultra White	InGaN	/		2.70	4.20	5000	10000	

■ Absolute maximum ratings (Ta=25°C)


Parameter	E	SR	LR	UR	UE	UY	UG	PG	BG	UB	UV	W	Unit
Forward Current I _F	25	25	25	25	30	30	30	30	30	30	30	30	mA
Power Dissipation P _d	60	60	60	60	65	65	75	110	110	120	120	120	mW
Reverse Voltage V _R	5	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I _{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	150	100	100	100	100	mA
Operation Temperature T _{OPR}	-40 to +80												°C
Storage Temperature T _{STG}	-40 to +85												°C
Lead Soldering Temperature TSOL	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)												°C

Round Type LED lamp, long lens head

BL-L314H16

■ Package configuration & Internal circuit diagram

BL-L314H16

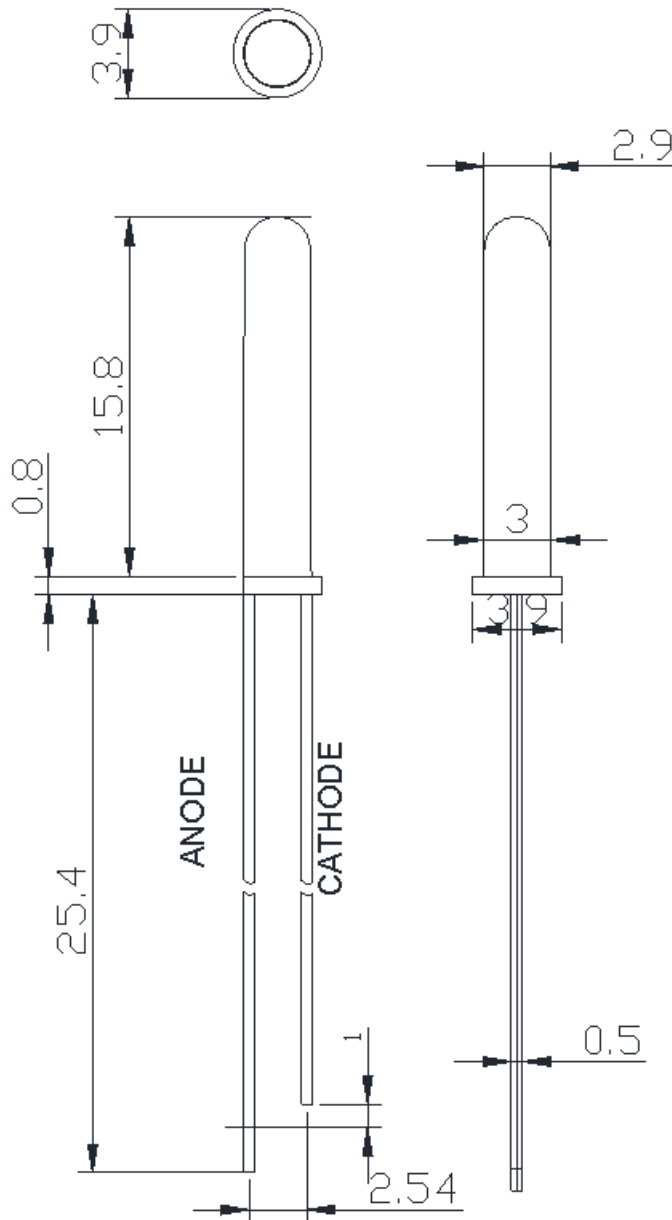


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


Round Type LED lamp,long lens head

BL-L314H16


■ Typical electrical-optical characteristics curves:

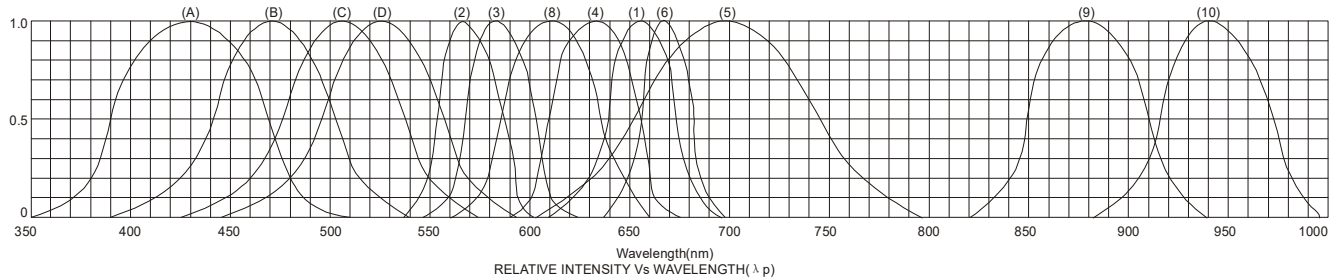


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

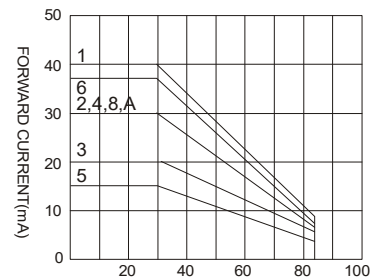

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

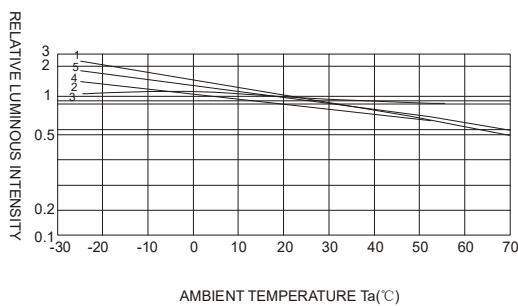

AMBIENT TEMPERATURE Ta(°C)

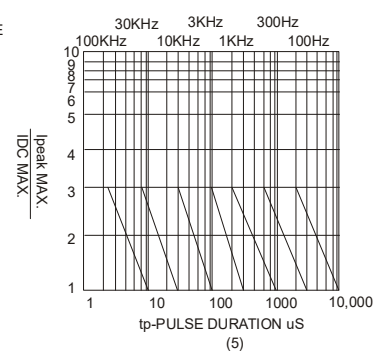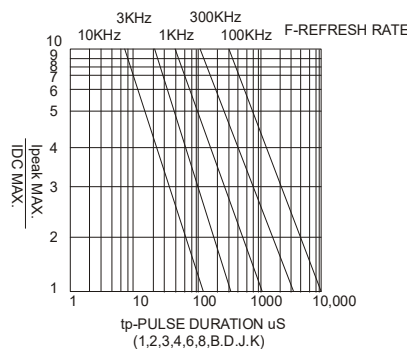

NOTE:25°C free air temperature unless otherwise specified

Round Type LED lamp, long lens head

BL-L314H16

■ Packing and weighting

