

Round Type LED lamp,10mm long lens head

BL-L513H10

Features:

- 5mm Round Type LED lamp,10mm long lens head
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens are available.
- IC compatible /Low current capability.
- RoHs Compliance



■ Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Electrical Optical Characteristics (Ta=25°C) (Test Condition: IF=20mA)									
Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ1/2 (deg)
	Emitted Color	Material	λP (nm)		Typ	Max	Min.	Typ.	
BL-L513H10SRC	Hi Red	AlGaAs,SH	660	Water Clear	1.85	2.20	50	250	20
BL-L513H10LRC	Super Red	AlGaAs,DH	660		1.85	2.20	250	600	
BL-L513H10URC	Ultra Red	AlGaAs,DDH	660		1.95	2.20	600	1000	
BL-L513H10UEC	Ultra Red	AlGaInP	630		2.10	2.50	800	3000	
BL-L513H10UYC	Ultra Yellow	AlGaInP	590		2.10	2.50	1000	3200	
BL-L513H10UGC	Ultra Green	AlGaInP	574		2.20	2.50	300	1700	
BL-L513H10PGC	Ultra Pure Green	InGaN	525		3.80	4.50	2000	7000	
BL-L513H10BGC	Ultra Bluish Green	InGaN	505		3.80	4.50	1800	6000	
BL-L513H10UBC	Ultra Blue	InGaN	470		2.70	4.20	2000	7000	
BL-L513H10UVC	UV	InGaN	405		3.80	4.50	80	150	
BL-L513H10UWC	Ultra White	InGaN	/		2.70	4.20	3000	10000	
BL-L513H10SRD	Hi Red	AlGaAs,SH	660	Diffused	1.85	2.20	20	80	60
BL-L513H10LRD	Super Red	AlGaAs,DH	660		1.85	2.20	50	120	
BL-L513H10URD	Ultra Red	AlGaAs,DDH	660		1.95	2.20	100	220	
BL-L513H10UED	Ultra Red	AlGaInP	630		2.10	2.50	1200	2000	
BL-L513H10UYD	Ultra Yellow	AlGaInP	590		2.10	2.50	1200	2200	
BL-L513H10UYOD	Ultra Yellow	AlGaInP	619		2.10	2.50	1200	2200	
BL-L513H10UGD	Ultra Green	AlGaInP	574		2.20	2.50	1450	1000	
BL-L513H10PGD	Ultra Pure Green	InGaN	525		3.80	4.50	1400	1900	
BL-L513H10BGD	Ultra Bluish Green	InGaN	505		3.80	4.50	1300	1800	
BL-L513H10UBD	Ultra Blue	InGaN	470		2.70	4.20	1400	1900	
BL-L513H10UWW	Ultra White	InGaN	/		2.70	4.20	2000	4000	

Round Type LED lamp,10mm long lens head


BL-L513H10

■ Absolute maximum ratings (Ta=25°C)

Parameter	SR	LR	UR	UE	UY	UG	PG	BG	B	UB	UV	W	Unit
Forward Current I_F	25	25	25	30	30	30	30	30	30	30	30	30	mA
Power Dissipation P_d	60	60	60	65	65	75	110	110	120	120	120	120	mW
Reverse Voltage V_R	5	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100	100	100	mA
Operation Temperature T_{OPR}	-40 to +80												°C
Storage Temperature T_{STG}	-40 to +85												°C
Lead Soldering Temperature TSOL	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)												°C

■ Package configuration & Internal circuit diagram

BL-L513H10 Series

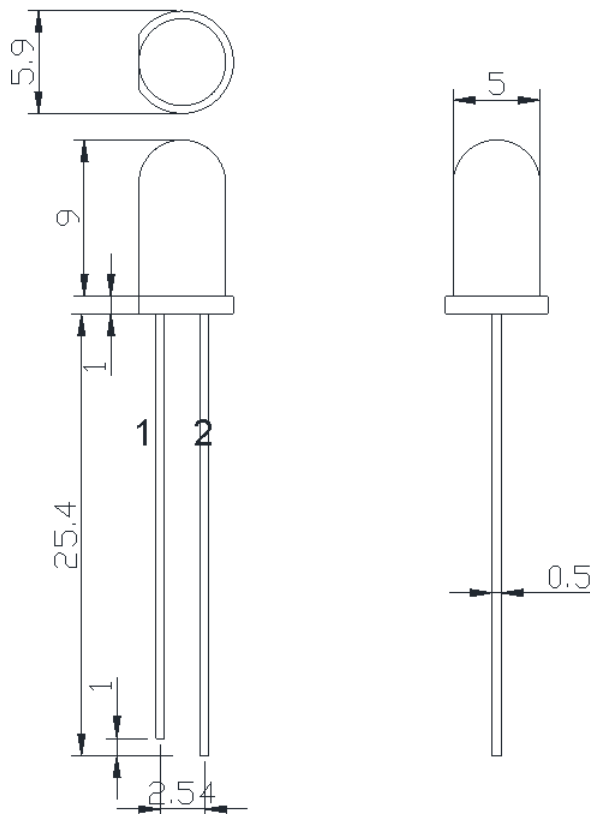


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


Round Type LED lamp,10mm long lens head

BL-L513H10


■ Typical electrical-optical characteristics curves:

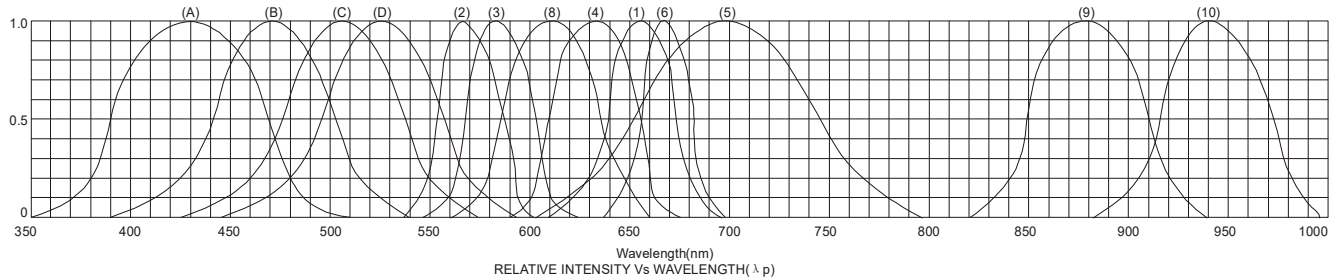


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

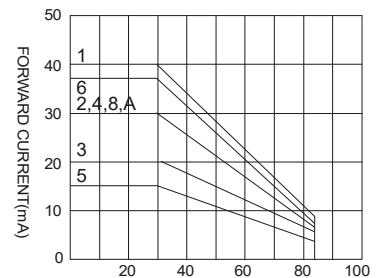

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

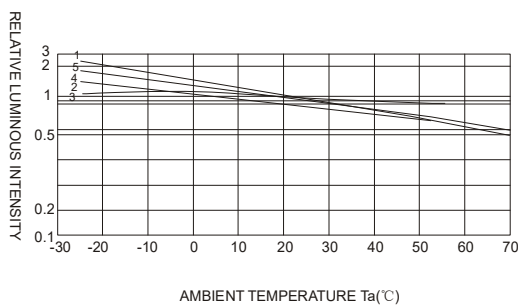

AMBIENT TEMPERATURE Ta(°C)

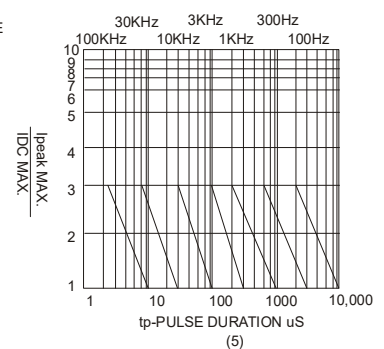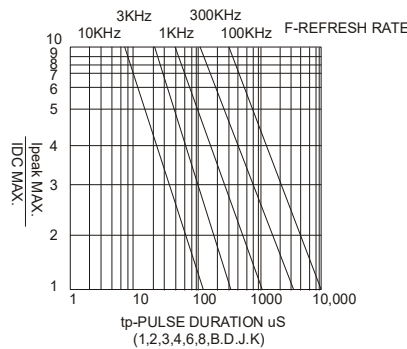

NOTE:25°C free air temperature unless otherwise specified

Round Type LED lamp,10mm long lens head

BL-L513H10

■ **Packing and weighting**

